2020 YEAR GLS GLE（Maybach type）Electric Side Step

---Installation Manual---

Ⅰ. Notes

1、Please read the instruction completely for easy installation , which will also help you to avoid scratches or other potential damages to your appealing car.

2、Please periodically check and retighten all the connecting hardware for safety use .

3、The figures here are for reference only and may have differences with the actual product you received, however they share the same assembly way.

Ⅱ.Function & Features

1、Exquisite and chic design, perfect fit with the body, superior quality.

2、Easy to install, do not need to drill holes in the bottom of the car, just borrow the original hole position of the car can be installed.

3、Automatic expansion, easy up and down, does not affect the body passability.

Ⅲ. Parts List

Parts Name	QTY	Remark
No.① Hook	2	
No.② Hook	8	
No.④ Hook	2	
outer hexagon bolt 8*30	2	
outer hexagon bolt 10*35	2	
Front bracket	2	
Rear bracket	2	with motor
Side step panel	2	

General installation steps (Refer to the installation video at the bottom of the manual)

1. Remove original car top bracket .

2. Take off original car side skirt and bottom guard plate .

3. Synchronous installation of e-side step wiring and motor bracket .

4. Install our matching side skirt .

5. Adjust bracket position .


6. Install the e-side step matching top bracket .


7. Cut the original car guard plate before installing it back .

8. Finish installation.

Ⅳ. Bracket diagram

When install the bracket , the screws should not be screwed tightly , after the side step is put on ,the switch test is no problem , then the screws should be fastened completely .

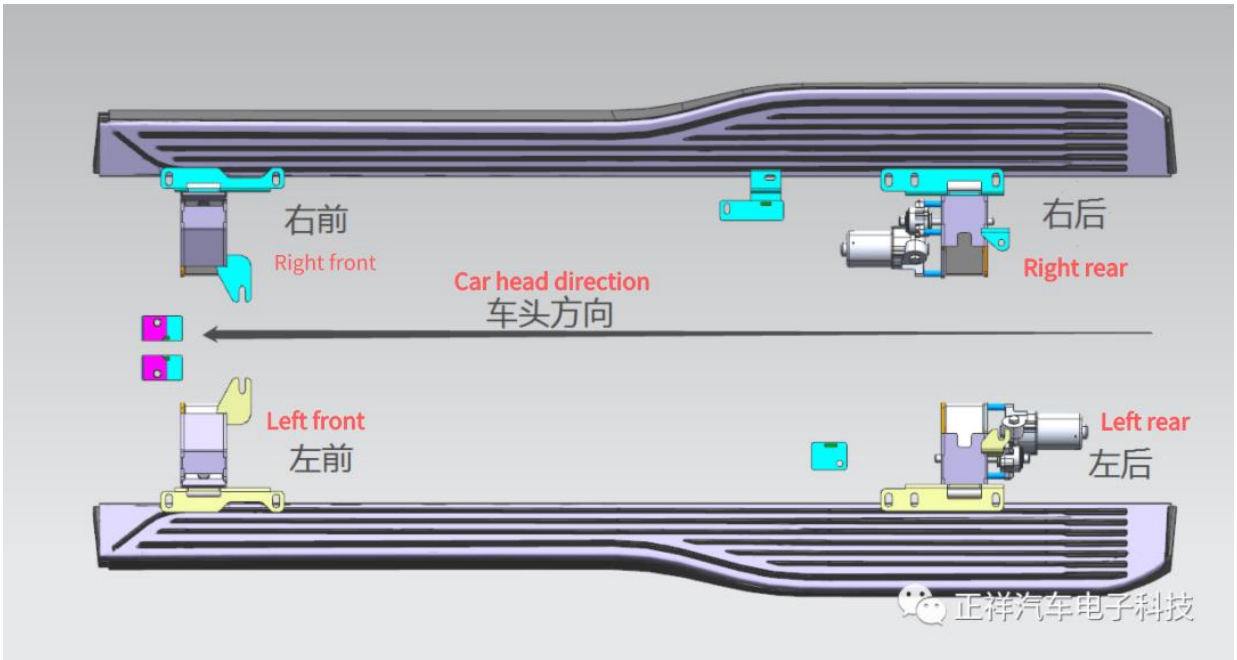

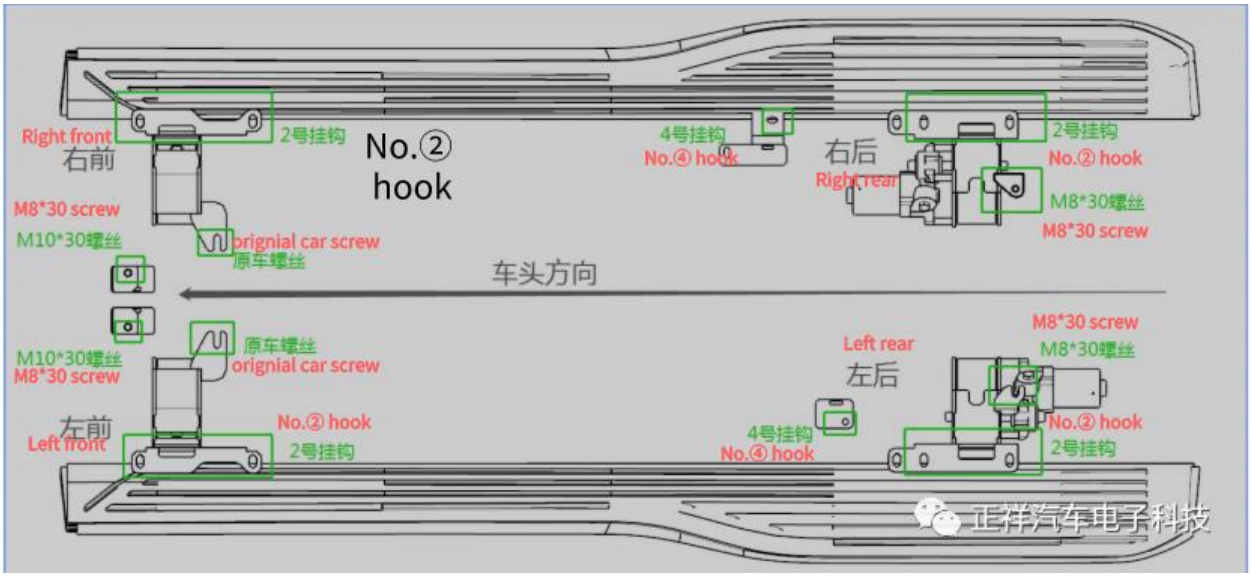
Right front
右前
2号挂钩
No.②
hook
4号挂钩
No.④ hook
右后
Right rear
2号挂钩
No.② hook
M8*30螺丝
M8*30 screw
M8*30 screw
M10*30螺丝
orignial car screw
原车螺丝
车头方向
M8*30 screw
M8*30螺丝
Left rear
左后
原车螺丝
orignial car screw
M10*30螺丝
M8*30 screw
左前
Left front
No.② hook
2号挂钩
4号挂钩
No.④ hook
No.② hook
2号挂钩
正祥汽车电子科技


左前支架
Left front
bracket
正祥汽车电子科技



Ⅴ.Wiring Harness Diagram


Remove the safety before installing the wiring harness and plug in the safety to debug after wiring harness is installed.


cathelectrode
负极
positive pole
正极
Controller
控制器
right motor wire
右电机线
左电机线
left motor wire
信号线
signal wire
控制器插头
Control plug
正祥汽车电子科技


信号线穿线孔
Signal cable threading hole
正祥汽车电子科技

Ⅵ. Wiring diagram


The engine compartment is connected to power, and the original signal is in the main driving threshold bar.

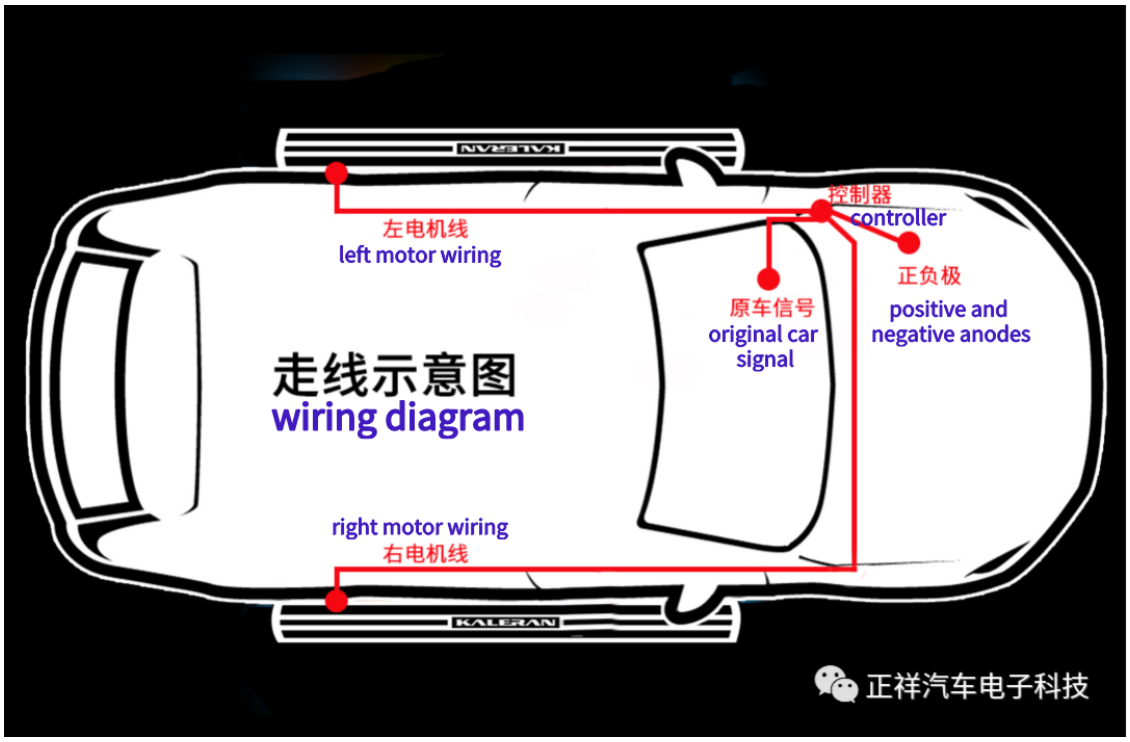




Ⅶ. Wiring diagram

It is located at the pedal triangle position of the main driving rest , CAN+ red cable connect to the brown-red cable , CAN- black cable connect to brown cable .

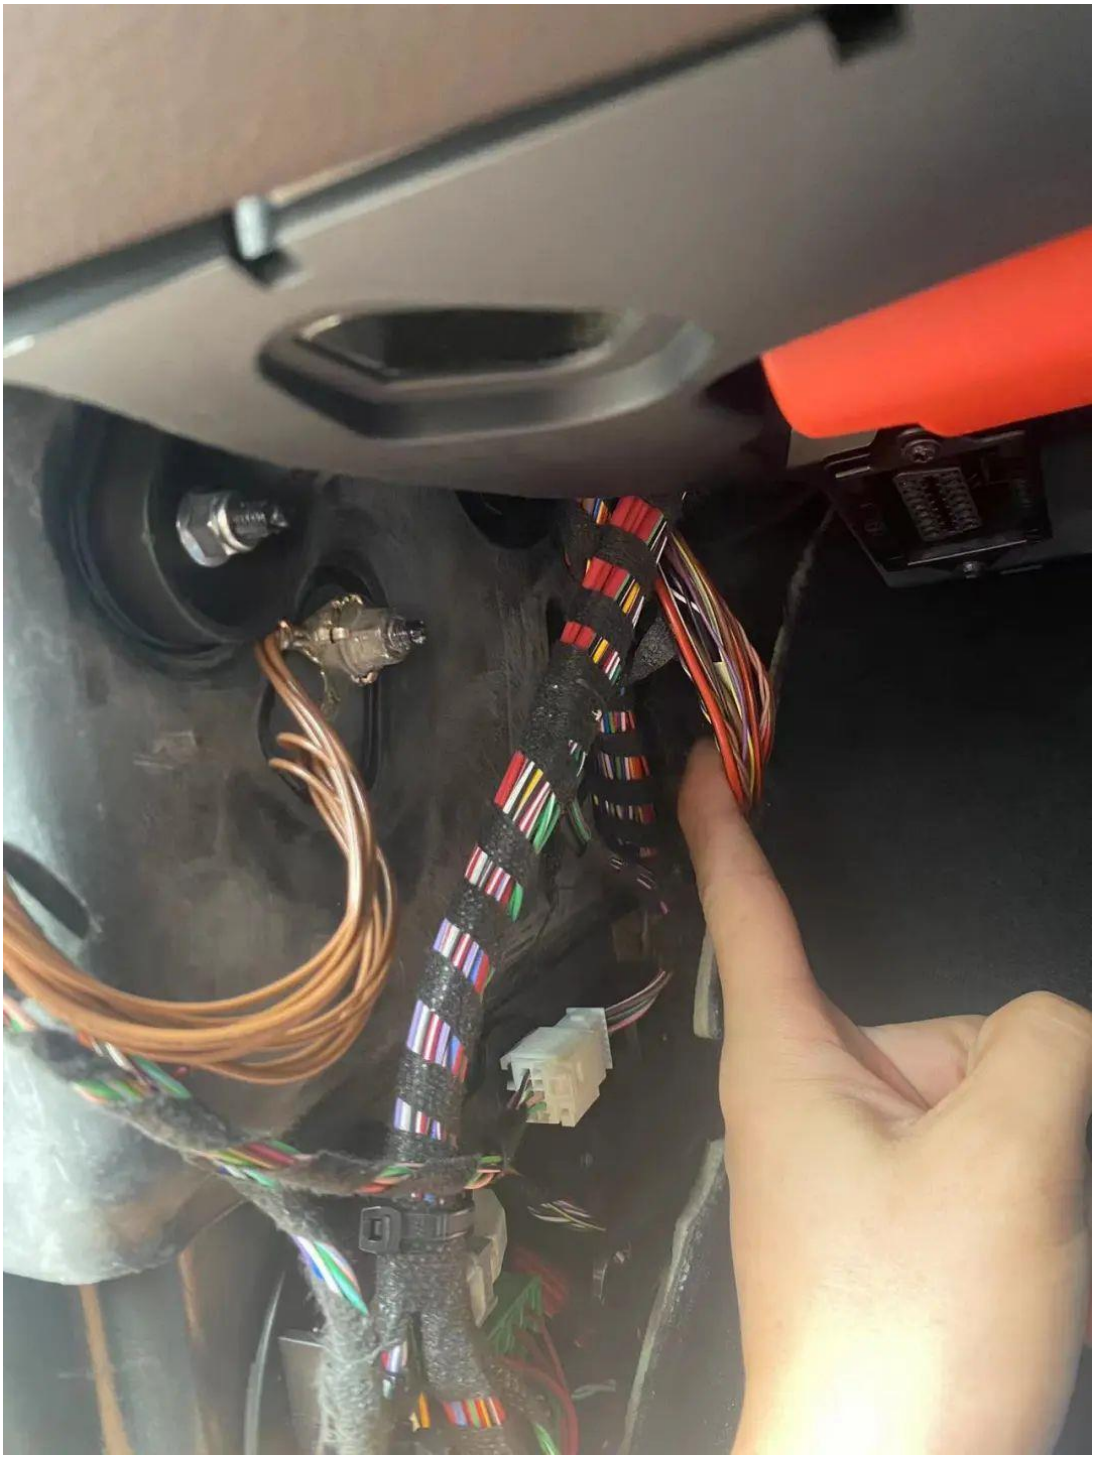

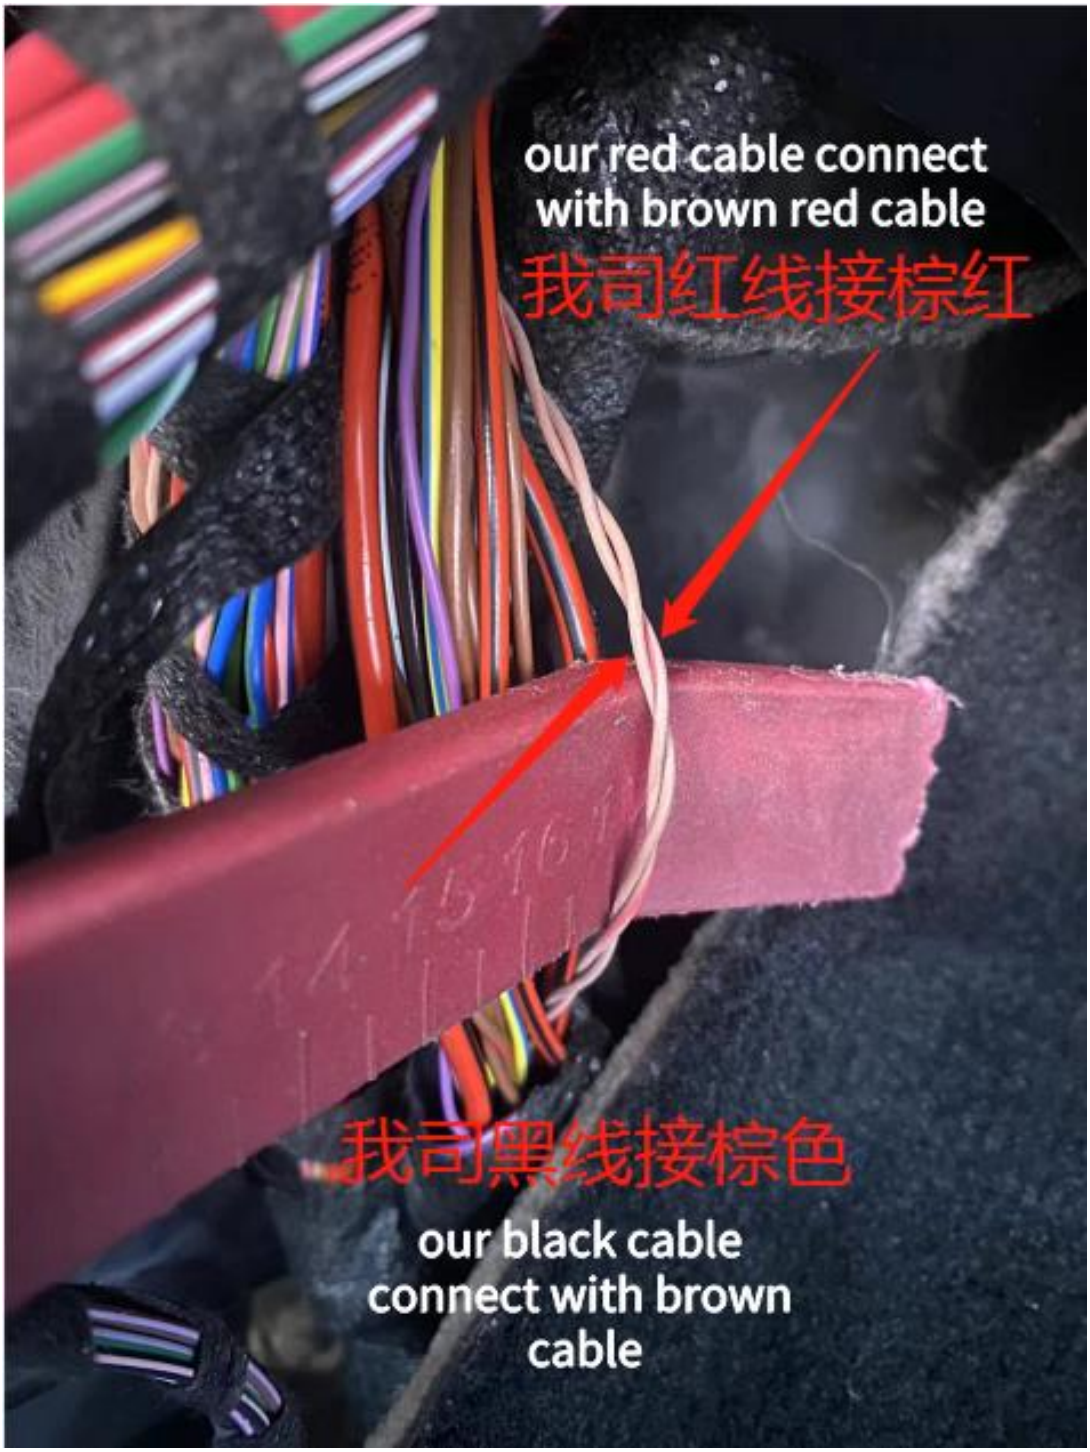


our red cable connect
with brown red cable
我司红线接棕红
我司黑线接棕色
our black cable
connect with brown
cable

Side Skirt Installation






Installation of top bracket



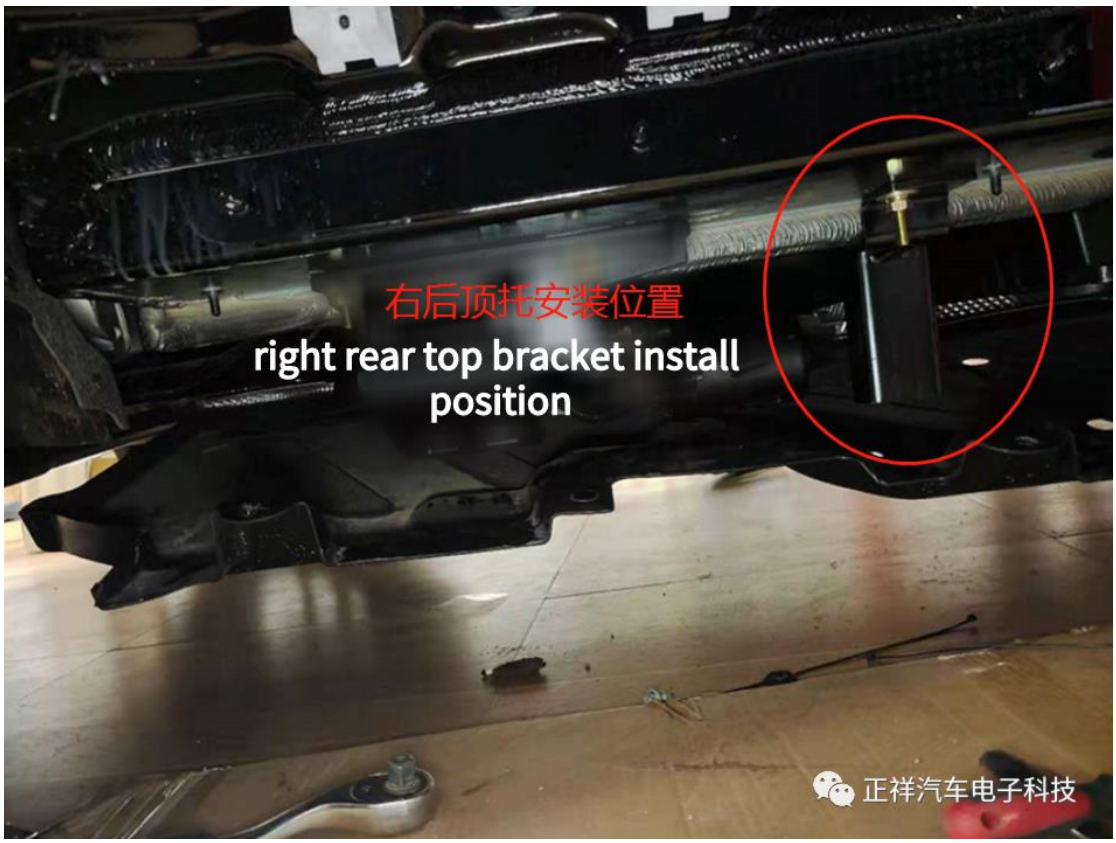


右后顶托安装位置
right rear top bracket install position
正祥汽车电子科技

The cutting position of the skirt of the bottom guard

